



| | Fresh Water | Pool Water | Sea Water | 220-240 V | 400 V | 110-120 V | 50 Hz | 60 Hz | 12 V AC | 24 V DC | DMX | DMX/RDM | Plug and Spray |
|-------|-------------|------------|-----------|-----------|-------|-----------|-------|-------|---------|---------|-----|---------|----------------|
| Comet | | | | | | | | | | | | | |

COMET 3-5 T TO 15-20 T

These single-jet nozzles generate a clear, full jet that is stable in wind.

These nozzles are usually arranged in a group. All sizes have a ball joint with which the jet can be pivoted up to 15° from the vertical plane.



Comet 15-20 T


This feature makes it possible to generate interesting water patterns.

The Comet 10-12 T and Comet 10-14 T is ideal for the combination with ProfiPlane LED 320 / DMX / 02 and ProfiRing LED 320 / DMX / 02 (see page 128-131).

Product characteristics at a glance

- Small to medium-sized clear-jet nozzles with flow director
- Fountain heights 0.5 m to 14.0 m
- Clear wind-stable full jet
- Up to 15° vertically pivoting ball joint
- Water-level independent
- Extensive design versatility: as a single fountain or in groups

| Accessories (must be ordered separately) | Order no. |
|--|-----------|
| Sleeve 10 silver (see page 244) | 51018 |
| Sleeve 15 silver (see page 244) | 51019 |
| Reducing sleeve 15 x 10 (see page 245) | 51032 |
| Reducing sleeve 20 x 15 (see page 245) | 51030 |

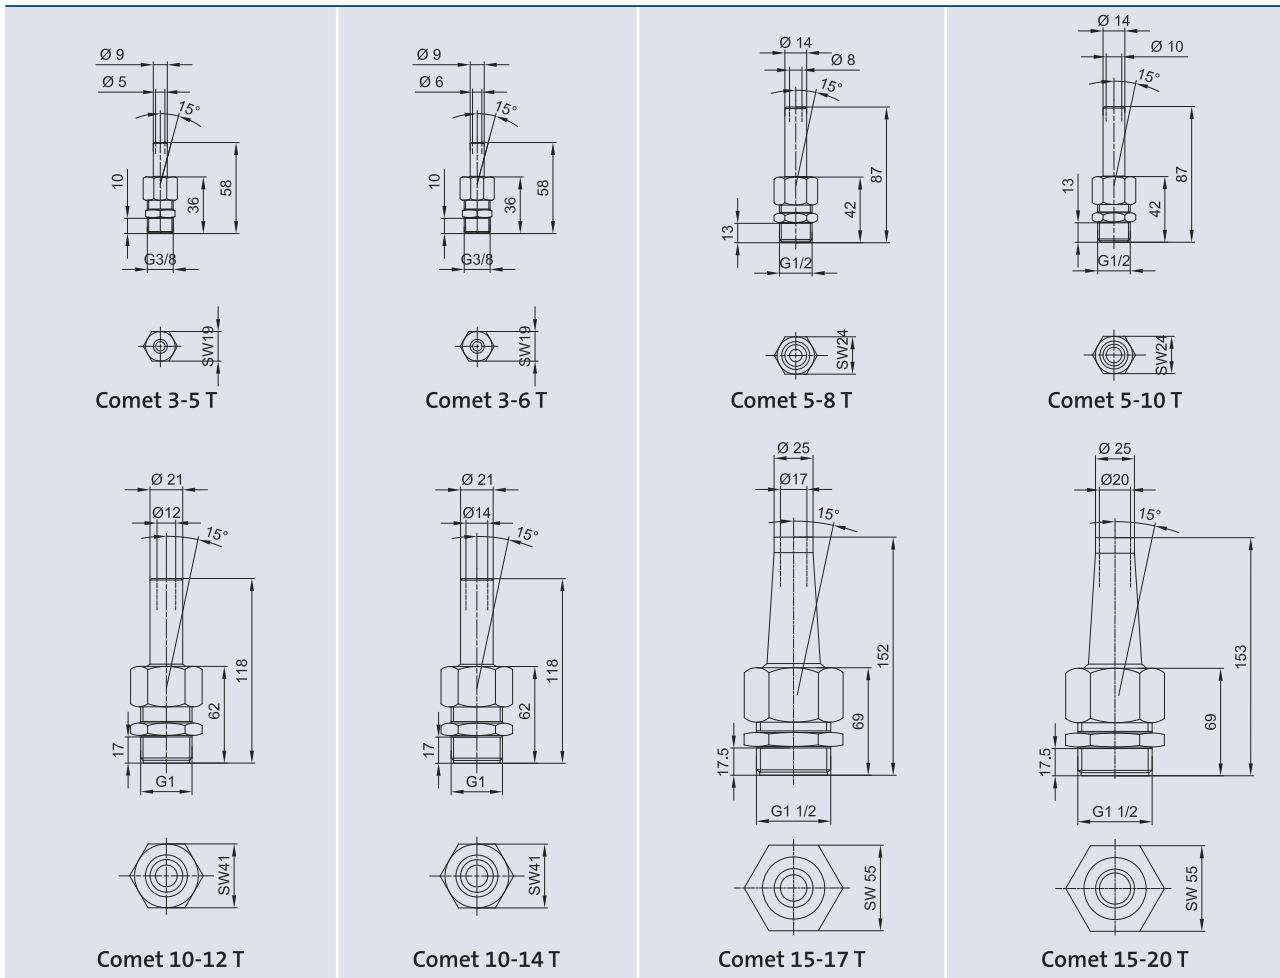

| | Comet 3-5 T | | Comet 3-6 T | | Comet 5-8 T | | Comet 5-10 T | | Comet 10-12 T | | Comet 10-14 T | | Comet 15-17 T | | Comet 15-20 T | |
|-----------------------|-------------|------|-------------|------|-------------|------|--------------|------|---------------|------|---------------|------|---------------|------|---------------|------|
| Dimensions (Ø x H mm) | 19 x 58 | | 21.9 x 58 | | 27.6 x 87 | | 27.6 x 87 | | 47.3 x 118 | | 47.3 x 118 | | 63.3 x 152 | | 63.3 x 152 | |
| Fountain height | DWB | DDB | DWB | DDB | DWB | DDB | DWB | DDB | DWB | DDB | DWB | DDB | DWB | DDB | DWB | DDB |
| | l/min | bar | l/min | bar | l/min | bar | l/min | bar | l/min | bar | l/min | bar | l/min | bar | l/min | bar |
| 0.50 [m] | 3.8 | 0.07 | 4.8 | 0.06 | 9.5 | 0.07 | 15 | 0.08 | 21 | 0.06 | 30 | 0.06 | 42 | 0.06 | 59 | 0.06 |
| 0.75 [m] | 5.3 | 0.09 | 6.2 | 0.09 | 11.5 | 0.10 | 19 | 0.11 | 25 | 0.08 | 37 | 0.09 | 52 | 0.09 | 74 | 0.08 |
| 1.00 [m] | 6.3 | 0.13 | 7.2 | 0.12 | 12.6 | 0.13 | 21 | 0.14 | 31 | 0.11 | 44 | 0.12 | 62 | 0.11 | 88 | 0.13 |
| 1.25 [m] | 7.2 | 0.15 | 8.7 | 0.15 | 14.9 | 0.16 | 25 | 0.18 | 35 | 0.14 | 50 | 0.15 | 69 | 0.14 | 99 | 0.16 |
| 1.50 [m] | 8.0 | 0.18 | 10.0 | 0.18 | 17.0 | 0.18 | 28 | 0.20 | 39 | 0.17 | 55 | 0.18 | 76 | 0.17 | 110 | 0.17 |
| 1.75 [m] | 8.7 | 0.22 | 11.1 | 0.21 | 18.8 | 0.21 | 31 | 0.25 | 43 | 0.21 | 60 | 0.21 | 82 | 0.19 | 119 | 0.21 |
| 2.00 [m] | 9.3 | 0.25 | 12.1 | 0.25 | 20.5 | 0.24 | 33 | 0.28 | 46 | 0.23 | 65 | 0.24 | 89 | 0.22 | 128 | 0.22 |
| 2.50 [m] | | | 14.0 | 0.32 | 23.4 | 0.32 | 37 | 0.36 | 53 | 0.29 | 73 | 0.30 | 100 | 0.28 | 144 | 0.28 |
| 3.00 [m] | | | 15.6 | 0.40 | 26.1 | 0.39 | 41 | 0.44 | 58 | 0.35 | 81 | 0.37 | 110 | 0.34 | 158 | 0.34 |
| 3.50 [m] | | | | | 28.5 | 0.47 | 45 | 0.52 | 63 | 0.42 | 87 | 0.43 | 119 | 0.40 | 171 | 0.39 |
| 4.00 [m] | | | | | 30.7 | 0.54 | 49 | 0.60 | 68 | 0.48 | 94 | 0.50 | 127 | 0.46 | 184 | 0.45 |
| 5.00 [m] | | | | | | | 55 | 0.76 | 76 | 0.61 | 105 | 0.62 | 143 | 0.58 | 206 | 0.57 |
| 6.00 [m] | | | | | | | 60 | 0.92 | 84 | 0.74 | 116 | 0.75 | 157 | 0.70 | 227 | 0.69 |
| 7.00 [m] | | | | | | | | | 91 | 0.87 | 125 | 0.88 | 170 | 0.82 | 245 | 0.81 |
| 8.00 [m] | | | | | | | | | 98 | 1.00 | 134 | 1.01 | 182 | 0.94 | 263 | 0.92 |
| 9.00 [m] | | | | | | | | | | | 143 | 1.14 | 193 | 1.06 | 279 | 1.04 |
| 10.00 [m] | | | | | | | | | | | 151 | 1.28 | 204 | 1.18 | 294 | 1.16 |
| 11.00 [m] | | | | | | | | | | | | | 214 | 1.30 | 309 | 1.28 |
| 12.00 [m] | | | | | | | | | | | | | 222 | 1.40 | 323 | 1.40 |
| 13.00 [m] | | | | | | | | | | | | | | | 337 | 1.52 |
| 14.00 [m] | | | | | | | | | | | | | | | 350 | 1.64 |
| Material | Brass | | | | | | | | | | | | | | | |
| Weight [kg] | 0.06 | | 0.06 | | 0.13 | | 0.13 | | 0.45 | | 0.45 | | 0.86 | | 0.86 | |
| Order no. NPT | - | | 89012 | | 89013 | | 89014 | | 89015 | | 89016 | | 89017 | | 89018 | |
| Order no. | 50959 | | 50960 | | 50964 | | 50965 | | 50968 | | 50969 | | 50970 | | 50971 | |